




36040 Meledo di Sarego (Vi) ITALIA  
 Tel. +390444-820044 Fax +390444-820050  
[www.bericacavi.com](http://www.bericacavi.com) e-mail: [sales@bericacavi.com](mailto:sales@bericacavi.com)

Cables for security systems, Al/Pet tape screen, halogen free.

### Comari Alarmkabel afgeschermd

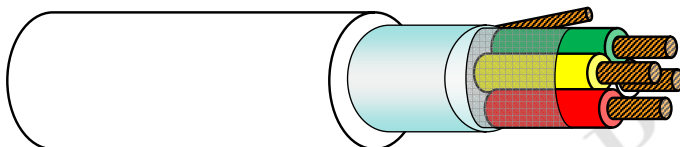

**CPR Compliant**  
**B2ca - s1,d0,a1**

Caratteristiche	Descrizione	Norme
<b>Conductors :</b>	annealed red copper cl.5	CEI EN 60228
<b>Insulation :</b>	LSZH compound	
<b>Cores colour :</b>	white- red- yellow- green- grey- orange-light blue- brown- purple -black (black and red for power supply)	
<b>Assembling :</b>	Pet tape	
<b>Drain wire :</b>	annealed red copper 7x0,20	
<b>Screen :</b>	Al/Pet tape	
<b>Sheath :</b>	LSZH	CEI EN 50363
<b>Sheath colour :</b>	white RAL 9010 or Orange RAL 2004	
<b>Halogen free :</b>	(< 0,5 mg/g - 0,5%)	CEI EN 50267-2-1/2 - IEC 60754-1/2
<b>Testing voltage :</b>	2000 V	
<b>Max working temperature :</b>	70 °C	
<b>Short circuit temperature :</b>	160 °C	
<b>Min. installation temperature :</b>	0 °C	
<b>Bending radius :</b>	Ø x 8	
<b>APPLICATION :</b>	Supply of communications in buildings and other civil engineering works with the objective of limiting the generation and spread of fire and smoke.	
<b>INSTALLATION:</b>	For fixed indoor installation in dry or temporarily wet environments and temporarily outdoor. They can be installed in cable trays, pipes, conduits, and similar systems. They can be laid together with power cables with marking both 450/750V, and 0.6 / 1 kV, used for systems with a nominal voltage to ground (Uo) up to 400 V. Not for direct burial.	

Type					Sheath	Medium	Medium	Product
(N° cores x sect.)					colour:	Outer Ø	Weight	code
N° x mmq								
4x0,22						5,30	21	B9903105012B00058
6x0,22						5,60	27	B9903105012B00053
8x0,22					White	5,95	32	B9903105012B00032
8x0,22					Orange	5,95	32	B9903105012B00034
12x0,22						6,60	39	B9903105012B00063
2x0,50+2x0,22						6,00	29	
2x0,50+4x0,22						6,20	35	B9903105012B00045
2x0,50+6x0,22						6,50	37	B9903105012B00046
2x0,50+8x0,22						6,70	46	B9903105012B00064
2x0,50+10x0,22						7,20	52	
2x0,75+2x0,22						6,40	35	
2x0,75+4x0,22						6,60	41	B9903105012B00062
2x0,75+6x0,22						6,80	46	B9903105012B00061
2x0,75+8x0,22						7,00	51	
2x0,75+10x0,22						7,20	61	B9903105012B00065

Code	Printing
B9903105012B00058	Comari Alarmkabel 4x0,22 MBZH LI-H(st)H B2ca-s1,d0,a1 CE B170987001401 Year/Lot 00000m
B9903105012B00053	Comari Alarmkabel 6x0,22 MBZH LI-H(st)H B2ca-s1,d0,a1 CE B170987001401 Year/Lot 00000m
B9903105012B00032	Comari Alarmkabel 8x0,22 MBZH LI-H(st)H B2ca-s1,d0,a1 CE B170987001401 Year/Lot 00000m
B9903105012B00034	Comari Alarmkabel 8x0,22 MBZH LI-H(st)H B2ca-s1,d0,a1 CE B170987001401 Year/Lot 00000m
B9903105012B00045	Comari Alarmkabel 2x0,5+4x0,22 MBZH LI-H(st)H B2ca-s1,d0,a1 CE B170987001401 Year/Lot 00000m
B9903105012B00046	Comari Alarmkabel 2x0,5+6x0,22 MBZH LI-H(st)H B2ca-s1,d0,a1 CE B170987001401 Year/Lot 00000m
B9903105012B00064	Comari Alarmkabel 2x0,5+8x0,22 MBZH LI-H(st)H B2ca-s1,d0,a1 CE B170987001401 Year/Lot 00000m
B9903105012B00060	Comari Alarmkabel 2x0,75+4x0,22 MBZH LI-H(st)H B2ca-s1,d0,a1 CE B170987001401 Year/Lot 00000m
B9903105012B00061	Comari Alarmkabel 2x0,75+6x0,22 MBZH LI-H(st)H B2ca-s1,d0,a1 CE B170987001401 Year/Lot 00000m
B9903105012B00065	Comari Alarmkabel 2x0,75+10x0,22 MBZH LI-H(st)H B2ca-s1,d0,a1 CE B170987001401 Year/Lot 00000m

Office	Date	Signature	Rev.	Date	Signature
Edit by :	06/06/2017		2	29/04/2020	
Checked by:	06/06/2017				